


Y STRAINERS For Oval Gear Meters



Oval Gear Meters work best with clean fluid, free of debris. GPI meters carries Y Strainers to fit most models of Oval Gear Meters. These strainers range from 1/4 in. to 2 in. models. All sizes come complete with blow-off and plug.

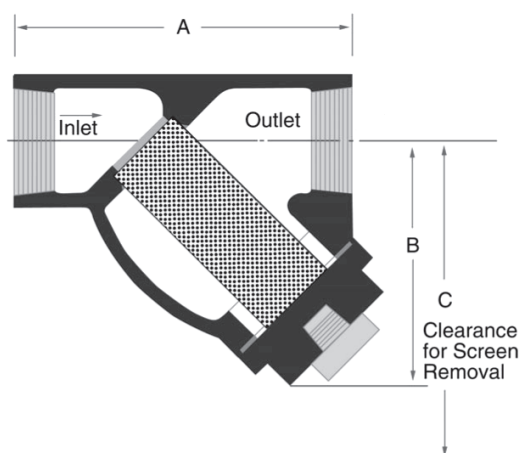

Select Your Strainer Size:

1/4 inch 1/2 inch 3/4 inch 1 inch
1-1/4 inch 1-1/2 inch 2 inch

Features and Benefits:

- ✓ Machined, tapered seat ensures a perfect fit for the removable, 316 Stainless Steel screen.
- ✓ 316 Stainless Steel body and all screens are 316 Stainless Steel.
- ✓ All sizes come complete with blow-off and plug. These can be replaced with ball valve for on-line blow-down of particulate.
- ✓ Rated for up to 1480 PSI at 100° F for water, oil or gas.
- ✓ Female NPT threads.

Y STRAINER – SPECIFICATIONS

Blow-off Fitting:	1/4 inch:	1/4" NPT
	1/2 inch:	1/4" NPT
	3/4 inch:	1/4" NPT
	1 inch:	1/2" NPT
	1-1/4 inch:	1/2" NPT
	1-1/2 inch:	1/2" NPT
	2 inch:	1/2" NPT
Screen Standard:	1/4 inch:	200 mesh
	1/2 inch:	60 mesh
	3/4 inch:	60 mesh
	1 inch:	60 mesh
	1-1/4 inch:	60 mesh
	1-1/2 inch:	60 mesh
	2 inch:	60 mesh
Screen Opening (inch):	1/4 inch:	0.011"
	1/2 inch:	0.032"
	3/4 inch:	0.032"
	1 inch:	0.032"
	1-1/4 inch:	0.032"
	1-1/2 inch:	0.032"
	2 inch:	0.032"
Shipping Weight:	1/4 inch:	4 lbs.
	1/2 inch:	4 lbs.
	3/4 inch:	5 lbs.
	1 inch:	6 lbs.
	1-1/4 inch:	8 lbs.
	1-1/2 inch:	10 lbs.
	2 inch:	18 lbs.

PART NUMBERS & DIMENSIONS

Part Number	Size	A	B	C
125700-01	1/4 inch:	3-1/4"	2-3/16"	3"
125700-02	1/2 inch:	3-1/4"	2-3/16"	3"
125700-03	3/4 inch:	3-5/8"	2-3/4"	3-1/4"
125700-04	1 inch:	4-1/4"	3-3/16"	4-1/8"
125700-05	1-1/4 inch:	5-1/4"	3-7/8"	5"
125700-06	1-1/2 inch:	6-1/4"	4-3/4"	5-7/8"
125700-07	2 inch:	7-5/8"	6"	8-1/8"